

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization  
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

**(43) International Publication Date**  
**3 May 2001 (03.05.2001)**

PCT

(10) International Publication Number  
WO 01/31963 A1

**(51) International Patent Classification<sup>7</sup>:** **H04Q 7/38**

**(21) International Application Number:** PCT/SE00/02008

**(22) International Filing Date:** 17 October 2000 (17.10.2000)

(25) Filing Language: English

(26) **Publication Language:** English

**(30) Priority Data:**

60/162.532	29 October 1999 (29.10.1999)	US
09/585.464	1 June 2000 (01.06.2000)	US

**(81) Designated States (national):** AE. AG. AL. AM. AT. AU. AZ. BA. BB. BG. BR. BY. BZ. CA. CH. CN. CR. CU. CZ. DE. DK. DM. DZ. EE. ES. FI. GB. GD. GE. GH. GM. HR. HU. ID. IL. IN. IS. JP. KE. KG. KP. KR. KZ. LC. LK. LR. LS. LT. LU. LV. MA. MD. ME. MK. MN. MW. MX. MZ. NO. NZ. PL. PT. RO. RU. SD. SE. SG. SI. SK. SL. TJ. TM. TR. TT. TZ. UA. UG. UZ. VN. YU. ZA. ZW.

**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: TELEFONAKTIEBOLAGET L M ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

**Published:**


- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(72) **Inventors:** **HASAN, Suhail:** PMB #335, Redmond Way Suite M., Redmond, WA 98052-4444 (US). **SUGIRTHARAJ, David:** 21 Merion Woods, St. Helen's Blacrock, County Dublin (IE). **TRAN, Hung:** 3536 Van Horne, Montreal, Quebec H3S 1R5 (CA). **OZKAN, Ibrahim:** 322 Eglinton Avenue East, Suite 1510, Toronto, Ontario M4P 1L6 (CA).

(74) Agent: KLAS, Norin; Ericsson Radio Systems AB. Common Patent Department, S-164 80 Stockholm (SE).

**(54) Title: MOBILE TERMINAL HANDOVER FROM A SECOND GENERATION NETWORK TO A THIRD GENERATION IP-BASED NETWORK**

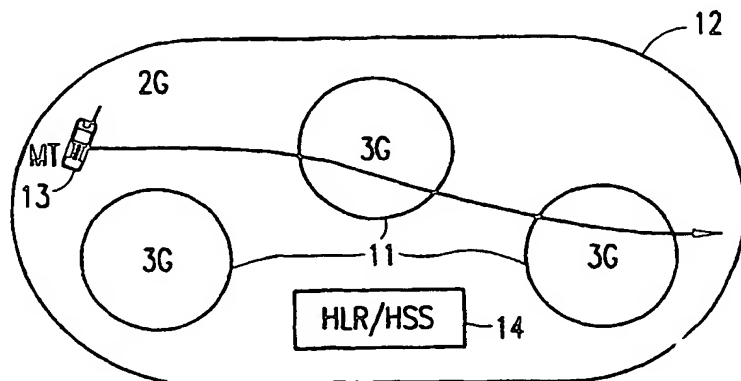

**(57) Abstract:** A method of handing over a mobile terminal from a second generation (2G) Anchor Mobile Switching Center (MSC(39)) in a 2G circuit-switched radio telecommunications network to a Serving General Packet Radio Service (GPRS) Service Node (SGSN(33)) in a third generation (3G) Internet Protocol (IP)-based radio telecommunications network. The handover is triggered not just by the availability of service by the 3G network, or by a stronger signal strength from the 3G network, but also by a request for a service that requires 3G coverage. In order to reduce potential handover delays, the mobile terminal is preregistered with the 3G network whenever 3G coverage is detected.

(44). A Handover Server (HOSV(35)) is implemented at the same hierarchical level as the MSC or the SGSN. The HOSV maintains backward compatibility with the 2G MSC during the handover procedure.

-1-

MOBILE TERMINAL HANDOVER FROM A SECOND GENERATION  
NETWORK TO A THIRD GENERATION IP-BASED NETWORK

PRIORITY STATEMENT UNDER 35 U.S.C. § 119(e) & 37 C.F.R. § 1.78

5           This nonprovisional application claims priority based upon the prior U.S. provisional patent application entitled, "System and Method for Handing Over a Circuit-Switched Call to a Mobile Station Operating in a Packet-Switched Network", application number 60/162,532, filed October 29, 1999, in the names of Suhail Hasan, David Sugitharaj, Hung Tran, and Ibrahim Ozkan.

10

BACKGROUND OF THE INVENTION

Technical Field of the Invention

          This invention relates to telecommunication systems and, more particularly, to a method of handing over a mobile terminal from a second generation (2G) circuit-switched network to a third generation (3G) Internet Protocol (IP)-based network.

15

Description of Related Art

          The third generation IP group (3G.IP) is a focus group that develops technical solutions for IP-based networks that will be introduced into the Third Generation Partnership Program (3G.PP) for standardization. Mobile terminals (MTs) access IP-based networks through a Radio Access Network (RAN), and the primary RANs in 3G.PP are the Enhanced Data Rates for General Packet Radio Service (EDGE) or the Universal Mobile Telecommunication System (UMTS), while the call control protocol may be either H.323 or the Session Initiation Protocol (SIP) to support real-time multimedia traffic.

20

25           3G.PP requires 3G networks to support new and existing services in such a way as to provide interworking of the services with other 3G networks and also with legacy second generation (2G) networks. These services may include, for example, speech, data, multimedia, Short Message Service (SMS), supplementary services, Virtual Home Environment (VHE), and new IP-based services such as email, etc. As  
30           such, 3G.PP requires the provisioning of handover of ongoing voice-only calls from

30

-2-

a 2G system to a 3G system.

There are no known solutions for dealing with 2G-to-3G handovers. An existing contribution to the 3G.PP standardization group has proposed a solution for the reverse, that is, the 3G-to-2G handover. However, handover from a 2G system to a 3G system is inherently more complicated than a 3G-to-2G handover. Setting up of the handover is complex, requiring a change of protocol stacks in a dual-stack mobile terminal, a change of radio frequency and time slot, and much more.

It is desirable for MSs to be able to roam freely, back and forth between older 2G networks and new 3G networks. In particular, it is desirable to be able to handover an MS from a 2G network to a 3G network so that the operator can offer additional services to the MS. Therefore, a method of handing over a mobile terminal from a 2G circuit-switched network to a 3G IP-based network is needed. The present invention provides such a method. The invention is applicable to Class B MSs that can utilize either the packet-switched 3G network or the circuit-switched 2G network at any given time, but not simultaneously.

#### SUMMARY OF THE INVENTION

In one aspect, the present invention is a method of handing over a mobile terminal from a first cell to a second cell of the type in which the first cell is in a first type of network, and the second cell is in a second type of network. The improvement provided by the present invention is that the handover is triggered not just by the availability of service by the second type of network, or by a stronger signal strength from the second type of network, but also by a request for a service that requires a capability of the second type of network. In the preferred embodiment, the first type of network is a second generation (2G) circuit-switched radio telecommunications network, and the second type of network is a third generation (3G) Internet Protocol (IP)-based radio telecommunications network.

In another aspect, the present invention is a method of handing over a mobile terminal from a 2G circuit-switched radio telecommunications network to a 3G IP-based radio telecommunications network. The method includes the steps of establishing a call from the mobile terminal in the 2G network, determining that the

-3-

mobile terminal is operating in an area of 3G network coverage, preregistering the mobile terminal with the 3G network, determining that the mobile terminal is requesting a service that requires 3G network coverage, and handing over the mobile terminal from the 2G network to the 3G network. Preregistration of the mobile terminal may include acquiring an IP address for the mobile terminal, acquiring a Gatekeeper having a Call State Control Function (CSCF), preregistering the mobile terminal with the CSCF, selecting a Gateway General Packet Radio Service (GPRS) Service Node (GGSN) as an Anchor GGSN, and selecting a Serving GPRS Service Node (SGSN) serving the target cell in the 3G network.

In yet another aspect, the present invention is a method of handing over a mobile terminal from a 2G Anchor Mobile Switching Center (MSC) in a 2G circuit-switched radio telecommunications network to a SGSN in a 3G IP-based radio telecommunications network. The method includes the steps of detecting by the mobile terminal that coverage is available from a target cell in the 3G network, preregistering the mobile terminal with the 3G network, determining whether the mobile terminal is requesting a service that requires 3G network coverage, retaining the mobile terminal in the 2G network if the mobile terminal is not requesting a service that requires 3G network coverage, and handing over the mobile terminal from the 2G network to the 3G network if the mobile terminal is requesting a service that requires 3G network coverage.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood and its numerous objects and advantages will become more apparent to those skilled in the art by reference to the following drawings, in conjunction with the accompanying specification, in which:

FIG. 1 is an illustrative drawing of a broad area of 2G coverage in which smaller pockets of 3G coverage have been deployed;

FIG. 2 is an illustrative drawing of a 2G protocol stack and a 3G protocol stack in a dual-stack mobile terminal suitable for use with the method of the present invention; and

-4-

FIGS. 3A-3C are a message flow diagram illustrating the messages, message content, and functions performed by network elements during a 2G-to-3G handover in accordance with the teachings of the present invention.

## 5 DETAILED DESCRIPTION OF EMBODIMENTS

The present invention is a method of handing over a mobile terminal from a second generation (2G) circuit-switched network to a third generation (3G) all IP-based network. Handover from a 2G system to a 3G system is inherently more complicated than a 3G-to-2G handover. MTs operating in 2G circuit-switched  
10 systems utilize a circuit-switched protocol layer and deal only with a circuit-switched architecture. To begin a call in a 2G environment and then be handed over to a 3G network requires not only a change of radio frequency and time slot, but also changing protocol stacks in a dual-stack MT, acquiring an IP address for the MT, acquiring a Gatekeeper having a Call State Control Function (CSCF), and registering the MT with  
15 that CSCF. Additionally, a Gateway GPRS Service Node (GGSN) must be chosen as an anchor GGSN, a Serving GPRS Service Node (SGSN) serving the target 3G cell must be identified, and Packet Data Protocol (PDP) and Mobility Management (MM) contexts must be set up in the core network. Of course, all of the above must be performed without dropping the call. There is also the added issue of when to actually  
20 perform the handover. Mere entry into an area of 3G coverage may not be sufficient grounds to implement a costly handover. The present invention implements a 2G-to-3G handover in a manageable and efficient manner.

In the method of the present invention, the critical factor triggering a 2G-to-3G handover is whether the user requires 3G services. If the user is just using speech  
25 services during and after a proposed handover to a 3G system, the benefit of setting up a PDP Context and CSCF registration may not be worth the effort, both to the caller and to the carrier. The decision to handover from 2G-to-3G is based primarily on the type of services required, rather than merely the availability of 3G coverage. If the PLMN operator can provide value added services such as concurrent ongoing speech  
30 along with email access and Wireless Application Protocol (WAP) service, the 2G-to-3G handover becomes a cost-effective procedure.

-5-

This invention solves complex issues involved in moving from a 2G call-control system to a 3G call-control system where an IP address, a call state control function (CSCF) transport address, and registration to that CSCF are required before successful handover can be achieved. Preregistration toward the 3G system, including the provisioning of an IP address for the MT, an IP address for the CSCF, choice of a GGSN and an SGSN, and the pre-building of a PDP Context before the actual handover is used to minimize delays during the handover.

FIG. 1 illustrates an initial 3G deployment scenario in which there are pockets of 3G coverage 11 within a broader area of 2G coverage 12. It may be reasonably assumed that initial 3G deployment will be in "islands" of 3G coverage within an already installed 2G coverage area. As shown in FIG. 1, this implies that a dual-stack mobile terminal (MT) 13 may initially register and launch a voice call in a 2G coverage area. As the caller enters an area of 3G coverage, the decision to perform a handover must be made. In the present invention, this decision is based, not just on the availability of 3G coverage, but also on the service requirements of the user. For example, the need to check email, or to upgrade to a multimedia call may trigger a 2G-to-3G handover if the MT is in a 3G coverage area. Also illustrated is a Home Location Register/Home Subscriber Server (HLR/HSS) 14. The HLR/HSS verifies that the user has a 3G subscription, and chooses an Anchor GGSN and a properly located SGSN to service the MT after the handover.

FIG. 2 is an illustrative drawing of a 2G protocol stack and a 3G protocol stack in a dual-stack MT 13 suitable for use with the method of the present invention. The stacks may share a physical layer 16, or the physical layer may be separated. For example, the 3G stack may use Wideband Code Division Multiple Access (WCDMA) while the 2G stack uses GSM. At the link layer in the 2G circuit-switched stack, the Global System for Mobile Communications (GSM) protocol 17 is shown for illustrative purposes. At the application layer is a GSM coder/decoder (codec) 18. The 3G stack is slightly more complex and includes, above the physical layer, a Medium Access Control (MAC) protocol 19 and, at the link layer, a Radio Link Control (RLC) protocol 21 and a Packet Data Control Protocol (PDCP) 22. 3G services flow between the RLC and the PDCP layers. At the application layer is the

-6-

Internet Protocol (IP) 23. The MAC layer interacts with a service trigger layer 24.

The present invention introduces service triggers 24 to determine when 2G-to-3G handover is required. If a call starts in the 2G system where there is no 3G coverage, a decision to handover to a 3G system is based not just on the availability of 3G coverage, but also on the type of services required by the user, such as multimedia or WAP service. For example, a subscriber is running a real-time application on a laptop, and connects the laptop to the MS. The service trigger determines the service requirement and launches an appropriate call, in this case a 3G session (i.e., the service requirement drives the need for a 2G call or a 3G session). Because of the complexity of the 2G-to-3G handover, the system only goes to 3G if the service requirements demand it.

In an exemplary scenario, a subscriber is traveling, for example, on a train. The subscriber turns on his MT and attempts to start a multimedia session that requires multiple bearers in a 3G network. The MT scans for 3G coverage, but there is none available, so the MT manages only to seize the voice bearer in the 2G network. Therefore, the subscriber makes a 2G voice call. At a later time, the subscriber enters an area of 3G coverage, and the MT detects a 3G signal above a minimum attenuation level. Handover is performed for the voice call, and the 3G service trigger launches preregistration toward the 3G system for the multimedia session. Doppler analysis may be performed to verify that the subscriber is traveling toward the 3G system rather than tangentially or away from the 3G system. Preregistration is performed prior to requesting a 2G-to-3G handover in order to minimize the time required for the handover. Additionally, this process is consistent with the 3G.IP philosophy of maintaining separation of the user plane (media) and the control plane (control signaling). When the handover is complete, the multimedia application can seize another bearer for the video, providing the subscriber with the desired multimedia session.

In basic Voice-over-IP (VoIP) protocols such as H.323 or SIP, the MT must have an IP address and have a full IP stack running. In addition, the MT must have a Gatekeeper with a CSCF. Therefore, since the exemplary scenario involves handover to a 3G system, the HLR selects an SGSN or GGSN ahead of time for the call. It



-7-

should be noted that the same basic procedures may be applied to a Code Division Multiple Access (CDMA) packet-based system in which a Packet Data Service Node (PDSN) is implemented instead of an SGSN or a GGSN.

5 The present invention also introduces a Handover Server (HOSV). The HOSV may be implemented as a stand-alone node or in a node hierarchically at the same level as an MSC or SGSN, and which includes Handover Server Functionality. During preregistration, the HOSV is provided with the MT's International Mobile Subscriber Identity (IMSI) and its IP address, etc. and makes sure that the 3G session is ready to launch by creating PDP contexts and performing CSCF registration for the MT. In addition, the HOSV is needed for backward compatibility purposes with 2G nodes such as the Anchor Mobile Switching Center (MSC). In the standard 2G handover, there is an Anchor MSC where the call is initially served. The Anchor MSC exchanges information with later-serving MSCs in a Prepare Handover message, and expects to receive Prepare Handover responses. The HOSV receives the Prepare Handover message and ensures that the expected responses are sent to the Anchor MSC.

There is another problem regarding the Point-to-Point Protocol (PPP) linkage between the Terminal Equipment (TE) such as a laptop computer, and the MT that, together, comprise a 3G MT. In all 3G systems, communication flowing between the application in the laptop TE and the MT occurs over the PPP protocol. Creating the link requires a Link Control Protocol (LCP) and a Network Control Protocol (NCP) in which the layer 3 protocol is identified (for example, IP). It is during the NCP stage that the IP address and, optionally, the CSCF can be exchanged between TE and the MT.

25 FIGS. 3A-3C are a message flow diagram illustrating the messages, message content, and functions performed by network elements during a 2G-to-3G handover in accordance with the teachings of the present invention. Participating nodes in the network include the terminal equipment (TE) 31, the MT 13, a serving Universal Transmission Radio Access Network (UTRAN) 32, an SGSN 33, a GGSN 34, an HOSV 35, a CSCF 36, a Media Gateway Control Function (MGCF) 37, the HLR 14, a Media Gateway (MGW) 38, an MSC 39, and a Base Station Controller (BSC) 40.

-8-

Based on the service trigger 24 in the MT, it is determined that the MT initially requires only 2G service, and therefore a 2G GSM IMSI Attach message 41 is sent to the MSC 39. At 42, the message is passed to the HLR, and a 2G call is set up. During the 2G call at 43, the MT periodically scans for an indication of available 3G coverage.

5 When 3G coverage is detected, the MT sends a 2G Direct Transfer Application Part (DTAP) message 44 to the MSC and includes the MT's IMSI and the Cell ID of the target 3G cell. The DTAP protocol is used to transfer call control, supplementary services management, and mobility management messages. The MSC sends a new 2G Mobile Application Part (MAP) message called the "3G Handover" (3G HO) message

10 45 to the HLR based on the IMSI of the MT. The 3G HLR (HLR/HSS) is modified to understand this message which is passed from the 2G MSC to the 3G HLR. At 46, the HLR checks the MT's subscriber profile to verify that the subscriber has a 3G subscription. If so, the HLR chooses an Anchor GGSN at 47 based on the Access Point Name (APN) and the IMSI. The APN indicates the subscriber's home ISP and

15 home Public Land Mobile Network (PLMN), and thus the GGSN 34 can be identified. The SGSN is chosen through a location analysis based on the target 3G cell where the MT is receiving the strongest 3G signal. If the true SGSN/Routing Area turns out to be different, RNS relocation type of signaling may be utilized.

At 48, the HLR requests the provisioning of a IP address for the MS by sending

20 a Build 3G PDP Context message to the GGSN 34. The Build 3G PDP Context message includes the MS's IMSI and MSISDN, the chosen SGSN, a target Routing Area, and an IP address request. At 49, the GGSN provides a dynamic IP address for the MT. The GGSN contains a Network Access Server (NAS) which provides dynamic IP addresses using the methodology in GSM 09.61 General Packet Radio

25 Service (GPRS) or UMTS 29.061. The GGSN may provide the address itself or obtain an address from a Radius server.

In order to minimize the handover time, the GGSN provides the dynamic IP address to the CSCF in a proxy 3G CSCF registration process 51. During this process, the Anchor GGSN and the CSCF are provided with information elements that include

30 the MT's IMSI, IP address and MSISDN. A Handover flag is also sent to the CSCF. Additionally, the information elements should include fast start parameters such as an

-9-

Initial Logical Channel based on the original service triggers. The GGSN then informs the HLR in a Build 3G PDP Context Acknowledgment message 52 of the chosen gatekeeper (CSCF#) and the assigned IP address. A PLMN may have multiple CSCFs, and the choice of the CSCF by the GGSN may be by one of several different methodologies such as weighted average or load sharing.

The GGSN then sends an Update PDP Context message 53 to the SGSN 33 to inform the SGSN of the MT's IP address. A PDP Context must be established for any packet data flow, therefore a PDP Context record must be established in both the SGSN and the GGSN. The message also includes an initial Network-level Service Access Point Interface (NSAPI-1). The NSAPI is a GPRS-specific service access point (for services provided by the SMDCP layer 22) on top of which the IP stack resides. All IP datagrams flow down the protocol layers through the NSAPI. While the MT is involved in a strictly 2G call, there is no packet data stack with an IP address and an associated NSAPI. Therefore, for a 2G-to-3G handover, the NSAPI must be provided to the MT by the network along with an IP address and a Gatekeeper address to create a firm binding between a dynamically generated 3G terminal and the mobile. The NSAPI-1 is used along with the MT's IMSI to build a unique 3G Tunnel ID (TID) for the MT. As part of the message exchange, the SGSN creates an initial Mobility Management (MM) Context.

At 54, the GGSN sends an Update HOSV message to the HOSV 35, and includes the IMSI, Anchor GGSN, SGSN, and CSCF IP address. Architecturally and hierarchically, the HOSV is on the same level as an MSC.

At this point, a 2G MAP 3G HO Acknowledgment message 55 is sent from the HLR to the MSC, and includes the assigned IP address, NSAPI-1, and the CSCF IP address as an optional information element. The MSC then sends a 2G DTAP Acknowledgment message 56 to the MT and includes the assigned IP address, NSAPI-1, and the CSCF along with 3G service-dependent parameters such as the RTP Logical Channels (LCN). A PPP LCP/NCP link 57 is then established between the MT and the TE, and the above parameters and information elements are used for launching a TCP/IP-based 3G stack. The process then moves to FIG. 3B.

When the MT's signal strength with the serving cell drops below a threshold

-10-

level, a measurement report 58 sent to the BSC causes the BSC to send a Handoff Required message 59 to the MSC indicating that handoff is required, and including a target cell for handoff. The service trigger 24 in the MT can force a handoff to a 3G cell. The MSC becomes an Anchor MSC, but instead of passing the MT to another MSC, it passes the MT to the HOSV.35. Thus, the MSC sends the target cell to the HOSV in a Prepare Handover Request message 61. At 62, the HOSV generates a handover number. Based on the handover number, the HOSV sends a Relocation Request 63 to the SGSN which was chosen previously for the MT's IMSI. The Relocation Request includes information elements for MM and PDP Contexts. This prepares the SGSN for handover.

At 64, the SGSN relays the Relocation Request to the serving UTRAN 32. The UTRAN sets up bearer channels on the radio side at 65 using the Access Link Control Application Part (ALCAP) protocol. ALCAP is a transport signaling protocol used in UMTS to set up and tear down transport bearers on the Iu, Iur, and Iub interfaces. The UTRAN then sends back a Relocation Request Acknowledgment message 66 to the SGSN. The SGSN, in turn, forwards the Relocation Request Acknowledgment to the HOSV at 67. The HOSV sends a new 3G call control message such as a Facility (or Setup) message 68 (H.225 or SIP) to the CSCF in the Gatekeeper indicating that handover is in progress. This message provides the CSCF with the handover number and the IP address of the MT which has already been received by the MT. Thus, the Gatekeeper is informed by the HOSV that it is getting a call from the MT.

This information must also be sent to the MGCF. In H.323, the gateway has been broken into two parts: the MGCF 37 and the MGW 38. There can be several MGWs controlled by one MGCF for scalability. The MGCF can also pick which MGW it wants. For the handover, the Gatekeeper CSCF sends a Facility message 69 to the MGCF indicating that there is a handover in progress. Facility Acknowledgment messages 71 and 72 are then returned to the CSCF and the HOSV. The HOSV then sends a Prepare Handover Response message 73 to the MSC with a handover number. The HOSV also indicates that the ISUP messaging should go to the MGCF.

The MSC then sends an ISUP Initial Address Message (IAM) 74 to the MGCF

-11-

and includes the handover number, Carrier Identification Code (CIC) number, and the Destination Point Code (DPC) of the MGCF. At 75, the MGCF matches the handover number with the handover number received in the Facility message 69 to determine which CSCF sent it. The MGCF then establishes a virtual connection for a 3G RTP  
5 termination with the 2G circuit-switched CIC by sending a Megaco CTX=ADD message 76 to the MGW. The MGW returns a CTX Response OK message 77, and the process then moves to FIG. 3C.

The MGCF then sends a Facility Redirect message 78 to the CSCF, and the message is forwarded to the HOSV at 79. This message informs the CSCF and the  
10 HOSV that the Megaco termination for this particular call has been set up. The HOSV then sends a Call Proceeding message 81 to the CSCF, and the message is forwarded to the MGCF at 82. These messages must go through the CSCF because the HOSV is acting as a proxy for the MT. An ACM message 83 is then sent from the MGCF to the MSC, and the MSC sends a Handover Command 84 to the BSC. The BSC then  
15 sends a Relocation Command 85 to the MT. The call is then switched to the 3G system at 86.

A Relocation Detect message 87 is sent from the MT to the HOSV via the serving UTRAN and the SGSN. Alerting is performed as normal, and the HOSV sends an Alerting signal 88 to the MGCF via the CSCF. Call Proceeding (CPG) is  
20 sent as normal from the MGCF to the MSC at 89. A Relocation Complete message 91 is then sent from the MT to the HOSV via the serving UTRAN and the SGSN. At 92, the HOSV sends a MAP Send End Signal Request as normal to the MSC. At 93, a Clear command is sent between the MSC and the BSC. At 94, the MT notifies the TE that full 3G coverage is provided, and the protocol stack is switched to the 3G  
25 stack at 95. A Facility Call Reconnect message 96 is then sent from the MT directly to the CSCF to demonstrate that the MT can talk to the CSCF directly. The CSCF then sends a Modify Call Context (CTX) message 97 to the MGCF, and the MGCF forwards the message to the MGW. At 98, the MGW returns a CTX Response OK message to the MGCF. Finally, an Answer Message (ANM) 99 is sent from the  
30 MGCF to the MSC indicating that the call is in progress, and diverting the 2G speech circuit towards the MSC.

-12-

Although the setting up of the 2G-to-3G handover is complex, the extra revenue earned by operators from these value-added services supports the implementation of 2G-to-3G handovers.

5 It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description. While the method shown and described has been characterized as being preferred, it will be readily apparent that various changes and modifications could be made therein without departing from the scope of the invention as defined in the following claims.

10

-13-

## WHAT IS CLAIMED IS:

1. In a method of handing over a mobile terminal from a first cell to a second cell of the type in which the first cell is in a first type of network, and the second cell is in a second type of network, the improvement wherein the handover is triggered by a request for a service that requires a capability of the second type of network.

2. The method of handing over a mobile terminal of claim 1 wherein the first type of network is a second generation (2G) circuit-switched radio telecommunications network, and the second type of network is a third generation (3G) Internet Protocol (IP)-based radio telecommunications network.

3. A method of handing over a mobile terminal from a second generation (2G) circuit-switched radio telecommunications network to a third generation (3G) Internet Protocol (IP)-based radio telecommunications network, said method comprising the steps of:

establishing a call from the mobile terminal in the 2G network;  
determining that the mobile terminal is operating in an area of 3G network coverage;  
determining that the mobile terminal is requesting a service that requires 3G network coverage; and  
handing over the mobile terminal from the 2G network to the 3G network.

4. The method of handing over a mobile terminal of claim 3 further comprising, after the step of determining that the mobile terminal is operating in an area of 3G network coverage, the step of preregistering the mobile terminal with the 3G network.

5. The method of handing over a mobile terminal of claim 4 wherein the step of preregistering the mobile terminal with the 3G network includes the steps of:

-14-

acquiring an IP address for the mobile terminal;  
acquiring a Gatekeeper having a Call State Control Function (CSCF); and  
preregistering the mobile terminal with the CSCF.

5           6.       The method of handing over a mobile terminal of claim 5 wherein the  
step of preregistering the mobile terminal with the 3G network also includes the steps  
of:

              selecting a Gateway General Packet Radio Service (GPRS) Service Node  
(GGSN) as an Anchor GGSN; and

10           selecting a Serving GPRS Service Node (SGSN) serving a target cell in the 3G  
network.

              7.       The method of handing over a mobile terminal of claim 6 wherein the  
step of selecting an Anchor GGSN includes selecting an Anchor GGSN based on an  
15       Access Point Name (APN) and an International Mobile Subscriber Identity (IMSI) for  
the mobile terminal.

              8.       The method of handing over a mobile terminal of claim 6 wherein the  
step of selecting an SGSN includes selecting the SGSN through a location analysis  
20       based on the target cell in the 3G network from which the mobile terminal is receiving  
a strongest signal.

              9.       The method of handing over a mobile terminal of claim 4 wherein the  
step of preregistering the mobile terminal with the 3G network includes providing a  
25       Handover Server (HOSV) with the mobile terminal's International Mobile Subscriber  
Identity (IMSI) and its IP address.

              10.      The method of handing over a mobile terminal of claim 9 further  
comprising implementing the HOSV at the same hierarchical level as a Mobile  
30       Switching Center (MSC).



-15-

11. The method of handing over a mobile terminal of claim 10 wherein the step of handing over the mobile terminal from the 2G network to the 3G network includes the steps of:

5 sending from the MSC to the HOSV, an identity of a target cell in the 3G network from which the mobile terminal is receiving a strongest signal, said target cell identity being sent in a Prepare Handover Request message; and

sending Prepare Handover Responses from the HOSV to the MSC.

10 12. The method of handing over a mobile terminal of claim 11 wherein the step of handing over the mobile terminal from the 2G network to the 3G network includes the steps of:

selecting a Serving GPRS Service Node (SGSN) serving the target cell, by performing a location analysis based on the target cell in the 3G network from which the mobile terminal is receiving a strongest signal; and

15 preparing the SGSN for handover by sending a Relocation Request from the HOSV to the SGSN, said Relocation Request including information elements for Mobility Management (MM) and Packet Data Protocol (PDP) Contexts.

20 13. The method of handing over a mobile terminal of claim 4 further comprising modifying a Home Location Register (HLR) in the 3G network to receive a "3G Handover" (3G HO) message, said message being a 2G Mobile Application Part (MAP) message which includes the International Mobile Subscriber Identity (IMSI) for the mobile terminal and a target cell in the 3G network from which the mobile terminal is receiving a strongest signal.

25 14. The method of handing over a mobile terminal of claim 13 wherein the step of preregistering the mobile terminal with the 3G network includes verifying by the HLR that the mobile terminal has a 3G subscription upon receiving the 3G HO message in the HLR.

30 15. The method of handing over a mobile terminal of claim 14 wherein the

-16-

step of preregistering the mobile terminal with the 3G network includes, upon verifying by the HLR that the mobile terminal has a 3G subscription, the steps of:

selecting by the HLR, a Gateway General Packet Radio Service (GPRS) Service Node (GGSN) as an Anchor GGSN; and

5 selecting by the HLR, a Serving GPRS Service Node (SGSN) serving the target cell in the 3G network from which the mobile terminal is receiving a strongest signal.

16. A method of handing over a mobile terminal from a second generation (2G) Anchor Mobile Switching Center (MSC) in a 2G circuit-switched radio telecommunications network to a Serving General Packet Radio Service (GPRS) Service Node (SGSN) in a third generation (3G) Internet Protocol (IP)-based radio telecommunications network, said method comprising the steps of:

detecting by the mobile terminal that coverage is available from a target cell in the 3G network;

15 preregistering the mobile terminal with the 3G network;

determining whether the mobile terminal is requesting a service that requires 3G network coverage;

retaining the mobile terminal in the 2G network if the mobile terminal is not requesting a service that requires 3G network coverage; and

20 handing over the mobile terminal from the 2G network to the 3G network if the mobile terminal is requesting a service that requires 3G network coverage.

17. The method of handing over a mobile terminal of claim 16 wherein the step of preregistering the mobile terminal with the 3G network includes the steps of:

25 acquiring an IP address for the mobile terminal;

acquiring a Gatekeeper having a Call State Control Function (CSCF);

preregistering the mobile terminal with the CSCF;

selecting a Gateway GPRS Service Node (GGSN) as an Anchor GGSN; and

selecting the SGSN serving the target cell in the 3G network.

30

-17-

18. The method of handing over a mobile terminal of claim 17 wherein the step of preregistering the mobile terminal with the CSCF includes enhancing the CSCF to perform a preregistration and retain the registration until a request for a 3G service triggers a handover of the mobile terminal to the 3G network.

5

19. The method of handing over a mobile terminal of claim 16 wherein the step of handing over the mobile terminal from the 2G network to the 3G network includes implementing a Handover Server in the 3G network to interface with the 2G Anchor MSC and maintain backward compatibility by providing responses expected by the 2G Anchor MSC in a 2G handover.

10

1/4

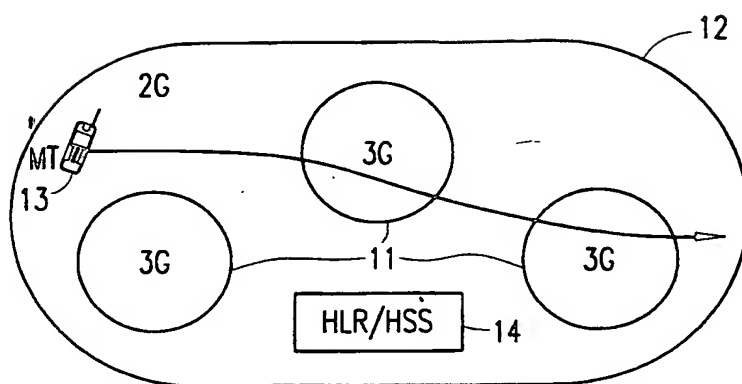


FIG. 1

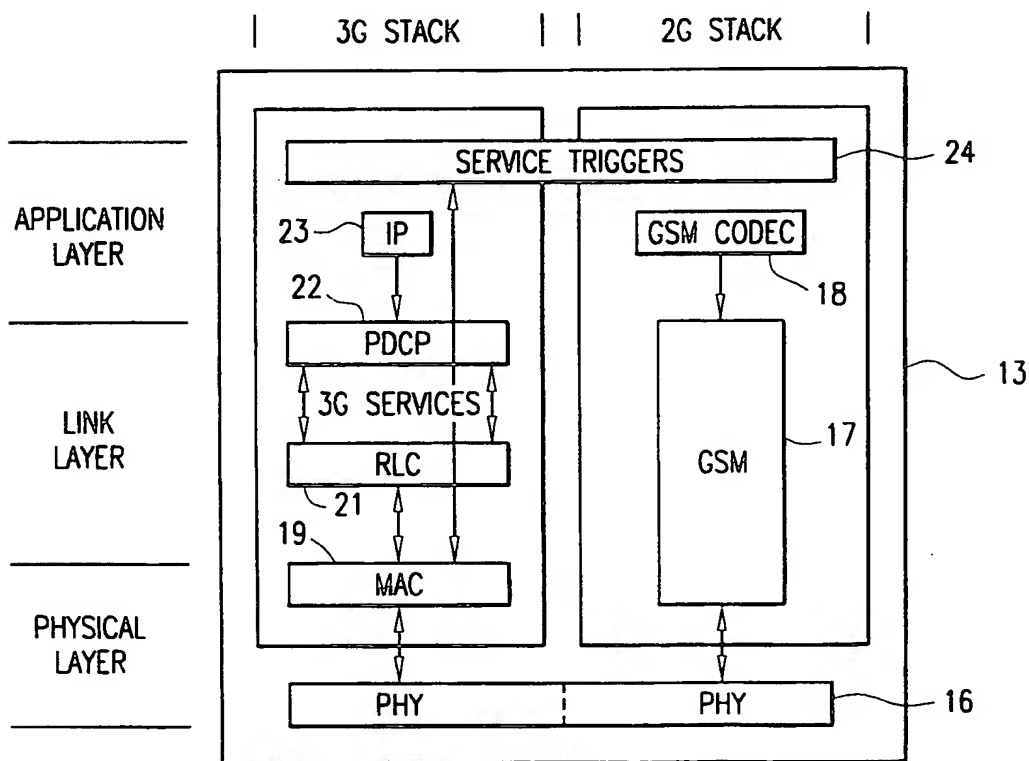


FIG. 2

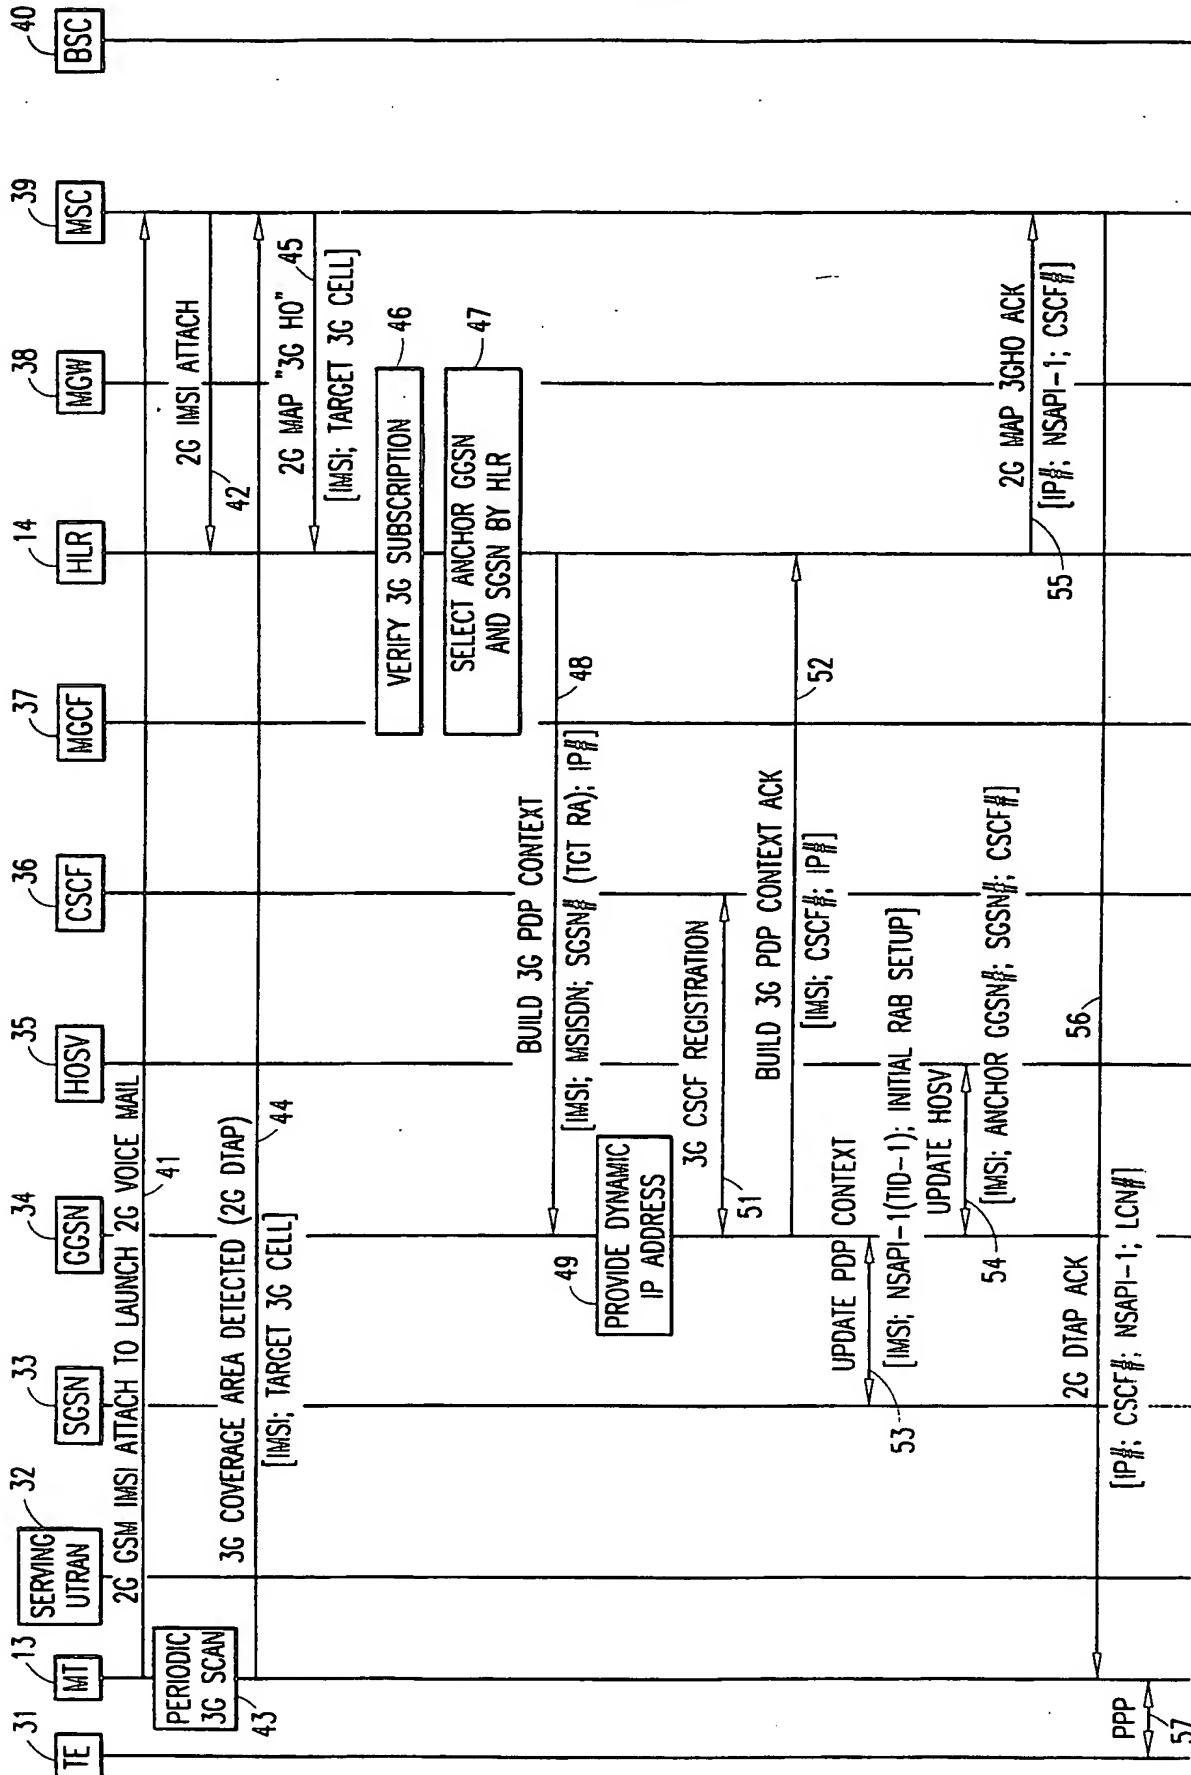


FIG. 3A

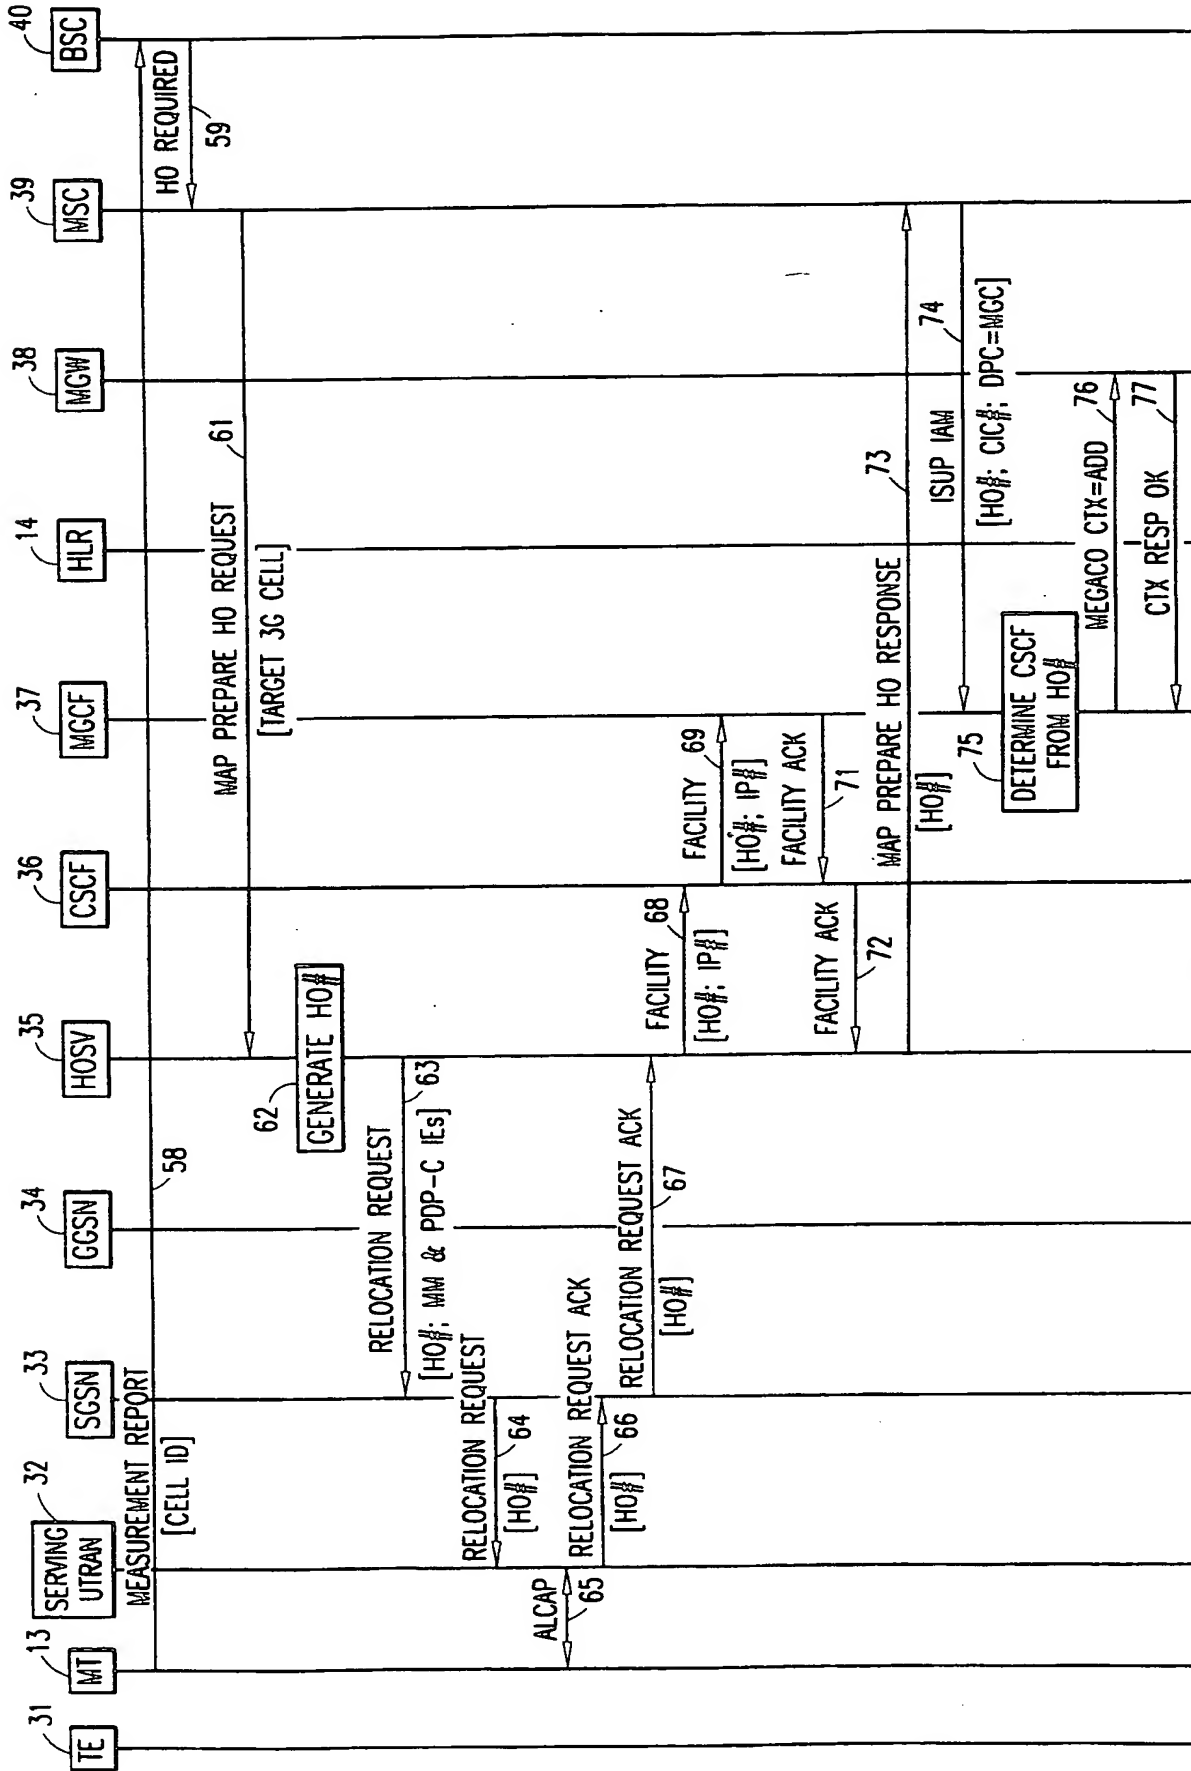


FIG. 3B

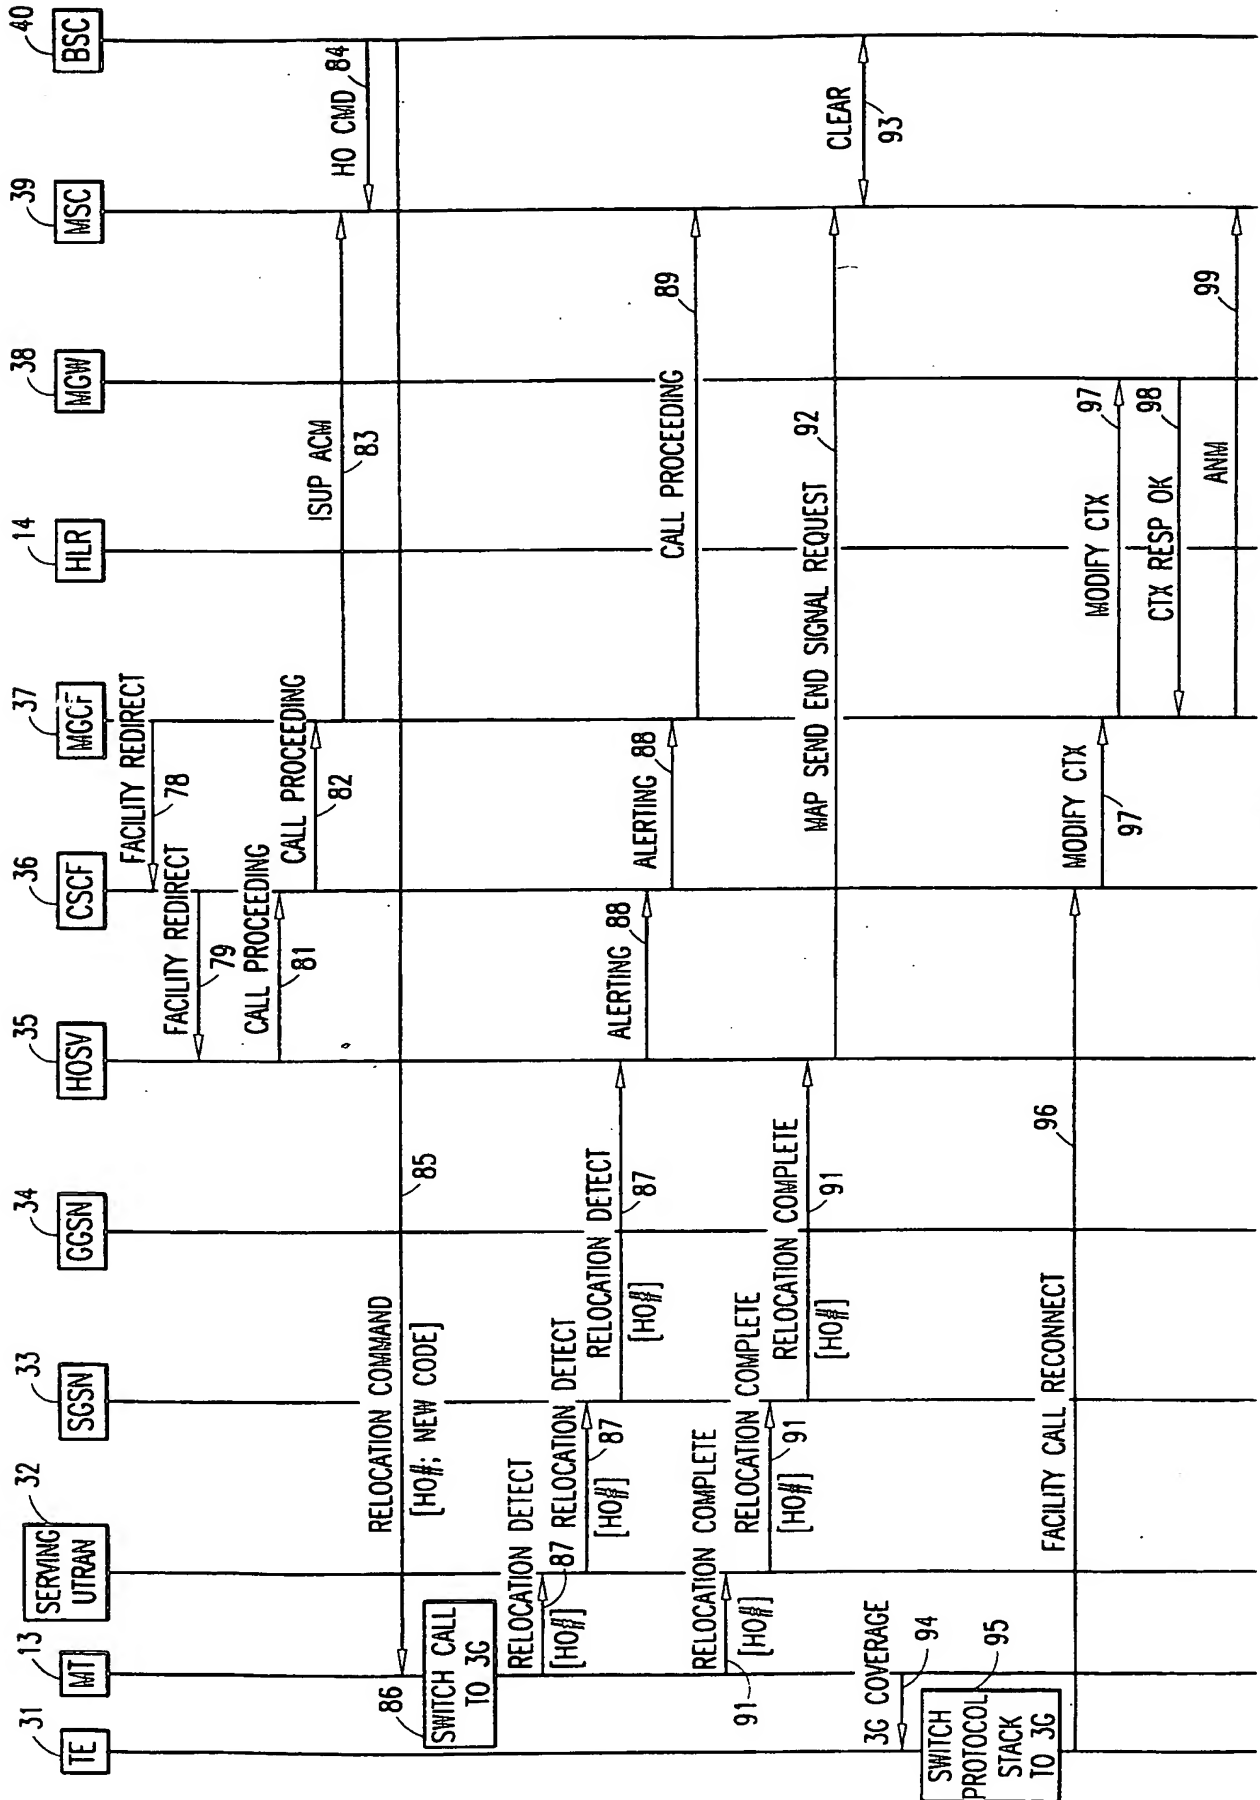


FIG. 3C

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/02008

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 0042808 A1 (ERICSSON, INC.), 20 July 2000 (20.07.00), abstract --	1-19
A	WO 9827776 A2 (NORTHERN TELECOM LIMITED), 25 June 1998 (25.06.98), page 4, line 26 - page 7, line 16 --	1-19
A	WO 9827777 A2 (NORTHERN TELECOM LIMITED), 25 June 1998 (25.06.98), abstract --	1-19

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

22 February 2001

Date of mailing of the international search report

19. 03. 2001

Name and mailing address of the ISA:  
European Patent Office

Authorized officer

Stefan Hansson/js

Facsimile No.

Telephone No.



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/02008

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9853620 A1 (NORTHERN TELECOM LIMITED), 26 November 1998 (26.11.98), page 3, line 7 - page 4, line 31  -- -----	1-19

# INTERNATIONAL SEARCH REPORT

Information on patent family members

05/02/01

International application No.

PCT/SE 00/02008

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	0042808	A1	20/07/00	AU	2050800 A	01/08/00
WO	9827776	A2	25/06/98	AU	5131298 A	15/07/98
				US	6026301 A	15/02/00
WO	9827777	A2	25/06/98	AU	5233298 A	15/07/98
				EP	0978209 A	09/02/00
				US	6021328 A	01/02/00
WO	9853620	A1	26/11/98	AU	7285598 A	11/12/98
				CN	1265253 T	30/08/00
				EP	0983694 A	08/03/00